

## 130 Watt Monocrystalline Photovoltaic Module

### Made with high efficiency back-contact solar cells

Copia Solar's 130 watt monocrystalline module has multiple advantages. These solar modules are made with back-contact monocrystalline solar cells which are aesthetically pleasing in appearance. The cells have a unique structure, different from conventional cells, they yield an average conversion efficiency up to 20.6%.

Copia Solar uses the highest quality materials in the manufacturing of our solar modules, and also maintains excellent quality control levels at our ISO 9001 qualified factory.



### Features

- Photovoltaic modules made with unique back-contact cells.
- Cells with high conversion efficiency up to 20.6%.
- Due to higher efficiency the modules are smaller in size than modules made with conventional cells.
- Black modules are available on special request.
- Copia Solar modules are made with high quality materials which qualifies the high reliability of the module.
- Designed to charge 12 to 48 volt batteries for off-grid remote power systems.
- Manufactured in ISO9001 certified factory.

### Limited Warranty

10 years limited power warranty of 90% of the minimum specified power rating, please refer to warranty details issued by Copia Solar/Manufacturer.

### Applications

- Telecommunication
- Water pumping for various agriculture and aquaculture applications
- Cathodic protection
- Lighting systems for emergency use and railroad
- Desalination systems
- Electricity for remote villages
- Security cameras
- Remote sensors
- Telemetry equipment

# 130 Watt Monocrystalline Photovoltaic Module


Made with high efficiency back-contact solar cells

## Electrical Characteristics

Model Number: COS-130-22

Max Power	Pmax	130W
Max Power Voltage	Vmp	19.8V
Max Power Current	Imp	6.55A
Open Circuit Voltage	Voc	24.10V
Short Circuit Current	Isc	7.11 A
Maximum System Voltage		70V
Series Fuse Rating		14A
Temperature Co-efficients		
	Power	-0.38%/°C
	Voltage	-66.0mV/°C
	Current	7.1mA/°C
Cell Efficiency		19.70%
Number of Cells in Series		36
Number of Strings in Parallel		4
Max Power Tolerance		+/-5%



## Dimensions Unit: mm [in]

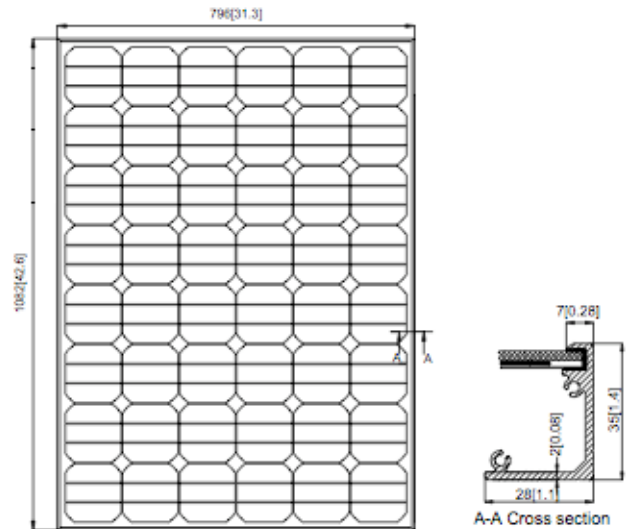

## Mechanical Characteristics

Weight	12kg,26.5lbs
Dimension	1082 x 796mm[42.6x31.3in]
Thickness, including junction box	35mm [1.38in]
Frame	>15µm clear anodized

## IV Curve

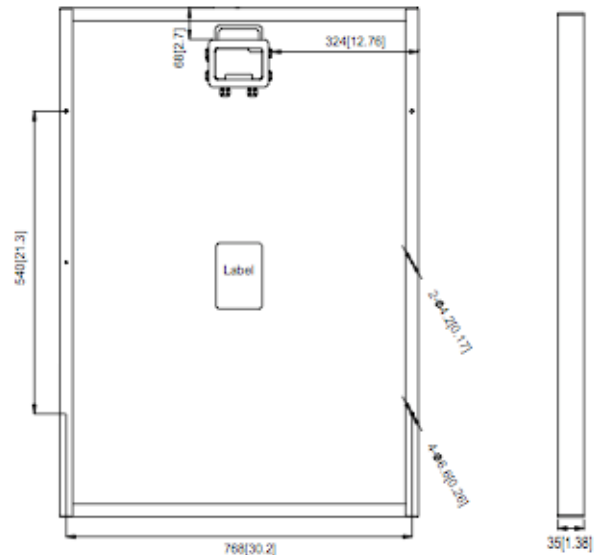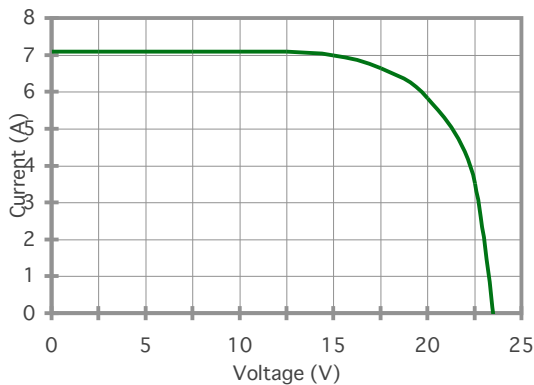

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m<sup>2</sup>, AM 1.5G, cell temperature 77°F/25°C)

2009 Copia Energy K.K. All right reserved. Specifications included in this datasheet are subject to change without notice.