

60 Watt Monocrystalline Photovoltaic Module

Made with high efficiency back-contact solar cells

Copia Solar's 60 watt monocrystalline module has multiple advantages. These solar modules are made with back-contact monocrystalline solar cells which are aesthetically pleasing in appearance. The cells have a unique structure, different from conventional cells, they yield an average conversion efficiency up to 21.2%.

Copia Solar uses the highest quality materials in the manufacturing of our solar modules, and also maintains excellent quality control levels at our ISO 9001 qualified factory.



Features

- Photovoltaic modules made with unique back-contact cells.
- Cells with high conversion efficiency up to 21.2%.
- Due to higher efficiency the modules are smaller in size than modules made with conventional cells.
- White modules are available on special request.
- Copia Solar modules are made with high quality materials which qualifies the high reliability of the module.
- Designed to charge 12 to 48 volt batteries for off-grid remote power systems.
- Manufactured in ISO9001 certified factory.

Limited Warranty

10 years limited power warranty of 90% of the minimum specified power rating, please refer to warranty details issued by Copia Solar/Manufacturer.

Applications

- Telecommunication
- Water pumping for various agriculture and aquaculture applications
- Cathodic protection
- Lighting systems for emergency use and railroad
- Desalination systems
- Electricity for remote villages
- Security cameras
- Remote sensors
- Telemetry equipment

60 Watt Monocrystalline Photovoltaic Module

Made with high efficiency back-contact solar cells


Electrical Characteristics

Model Number: COS-60-11

Max Power	P _{max}	60W
Max Power Voltage	V _{mp}	16.9V
Max Power Current	I _{mp}	3.56A
Open Circuit Voltage	V _{oc}	20.3V
Short Circuit Current	I _{sc}	3.99A
Maximum System Voltage		70V
Series Fuse Rating		9A
Temperature Co-efficients		
	Power	-0.38%/°C
	Voltage	-58.7mV/°C
	Current	3.5mA/°C
Cell Efficiency		20.30%
Number of Cells in Series		32
Number of Strings in Parallel		2
Max Power Tolerance		+/-5%

Dimensions


Unit: mm [in]

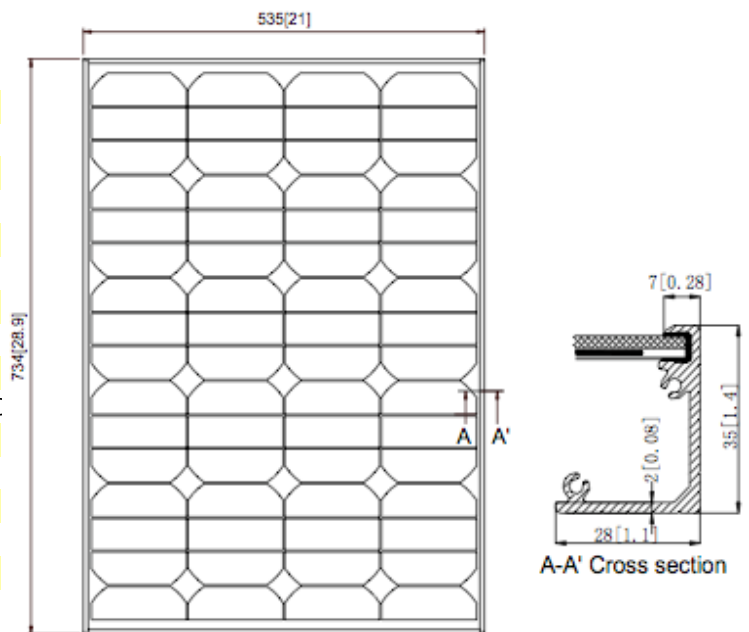

Mechanical Characteristics

Weight	5.20kg, 11.5lbs
Dimension	734 x 535mm [28.9*21in]
Thickness, including junction box	35mm [1.38in]
Frame	>15µm clear anodized

IV Curve

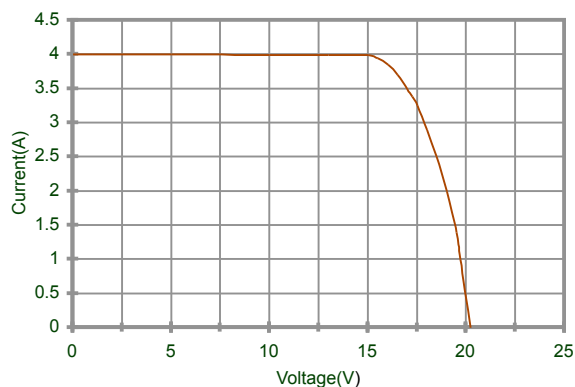

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

2009 Copia Energy K.K. All right reserved. Specifications included in this datasheet are subject to change without notice.

